

# EMANCIPATION PROCLAMATION & FREEDOM

DAUB & FIRMIN STUDIOS

October 19, 2015







Pen	36' tall (max)
Pen Nib	10' 6"
Scroll	36' along curve 7'6" short end 13' high end 16" thick bottom 11" thick top
Freedom Script	18' 3" along script arc
Plaza Circle	50' diameter 1' 6" border Non-slip granite is 3" thick
Lincoln Portrait:	27" tall









Emancipation  
Proclamation

January 1, 1863


Free




FREEDOM FOREVER

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----



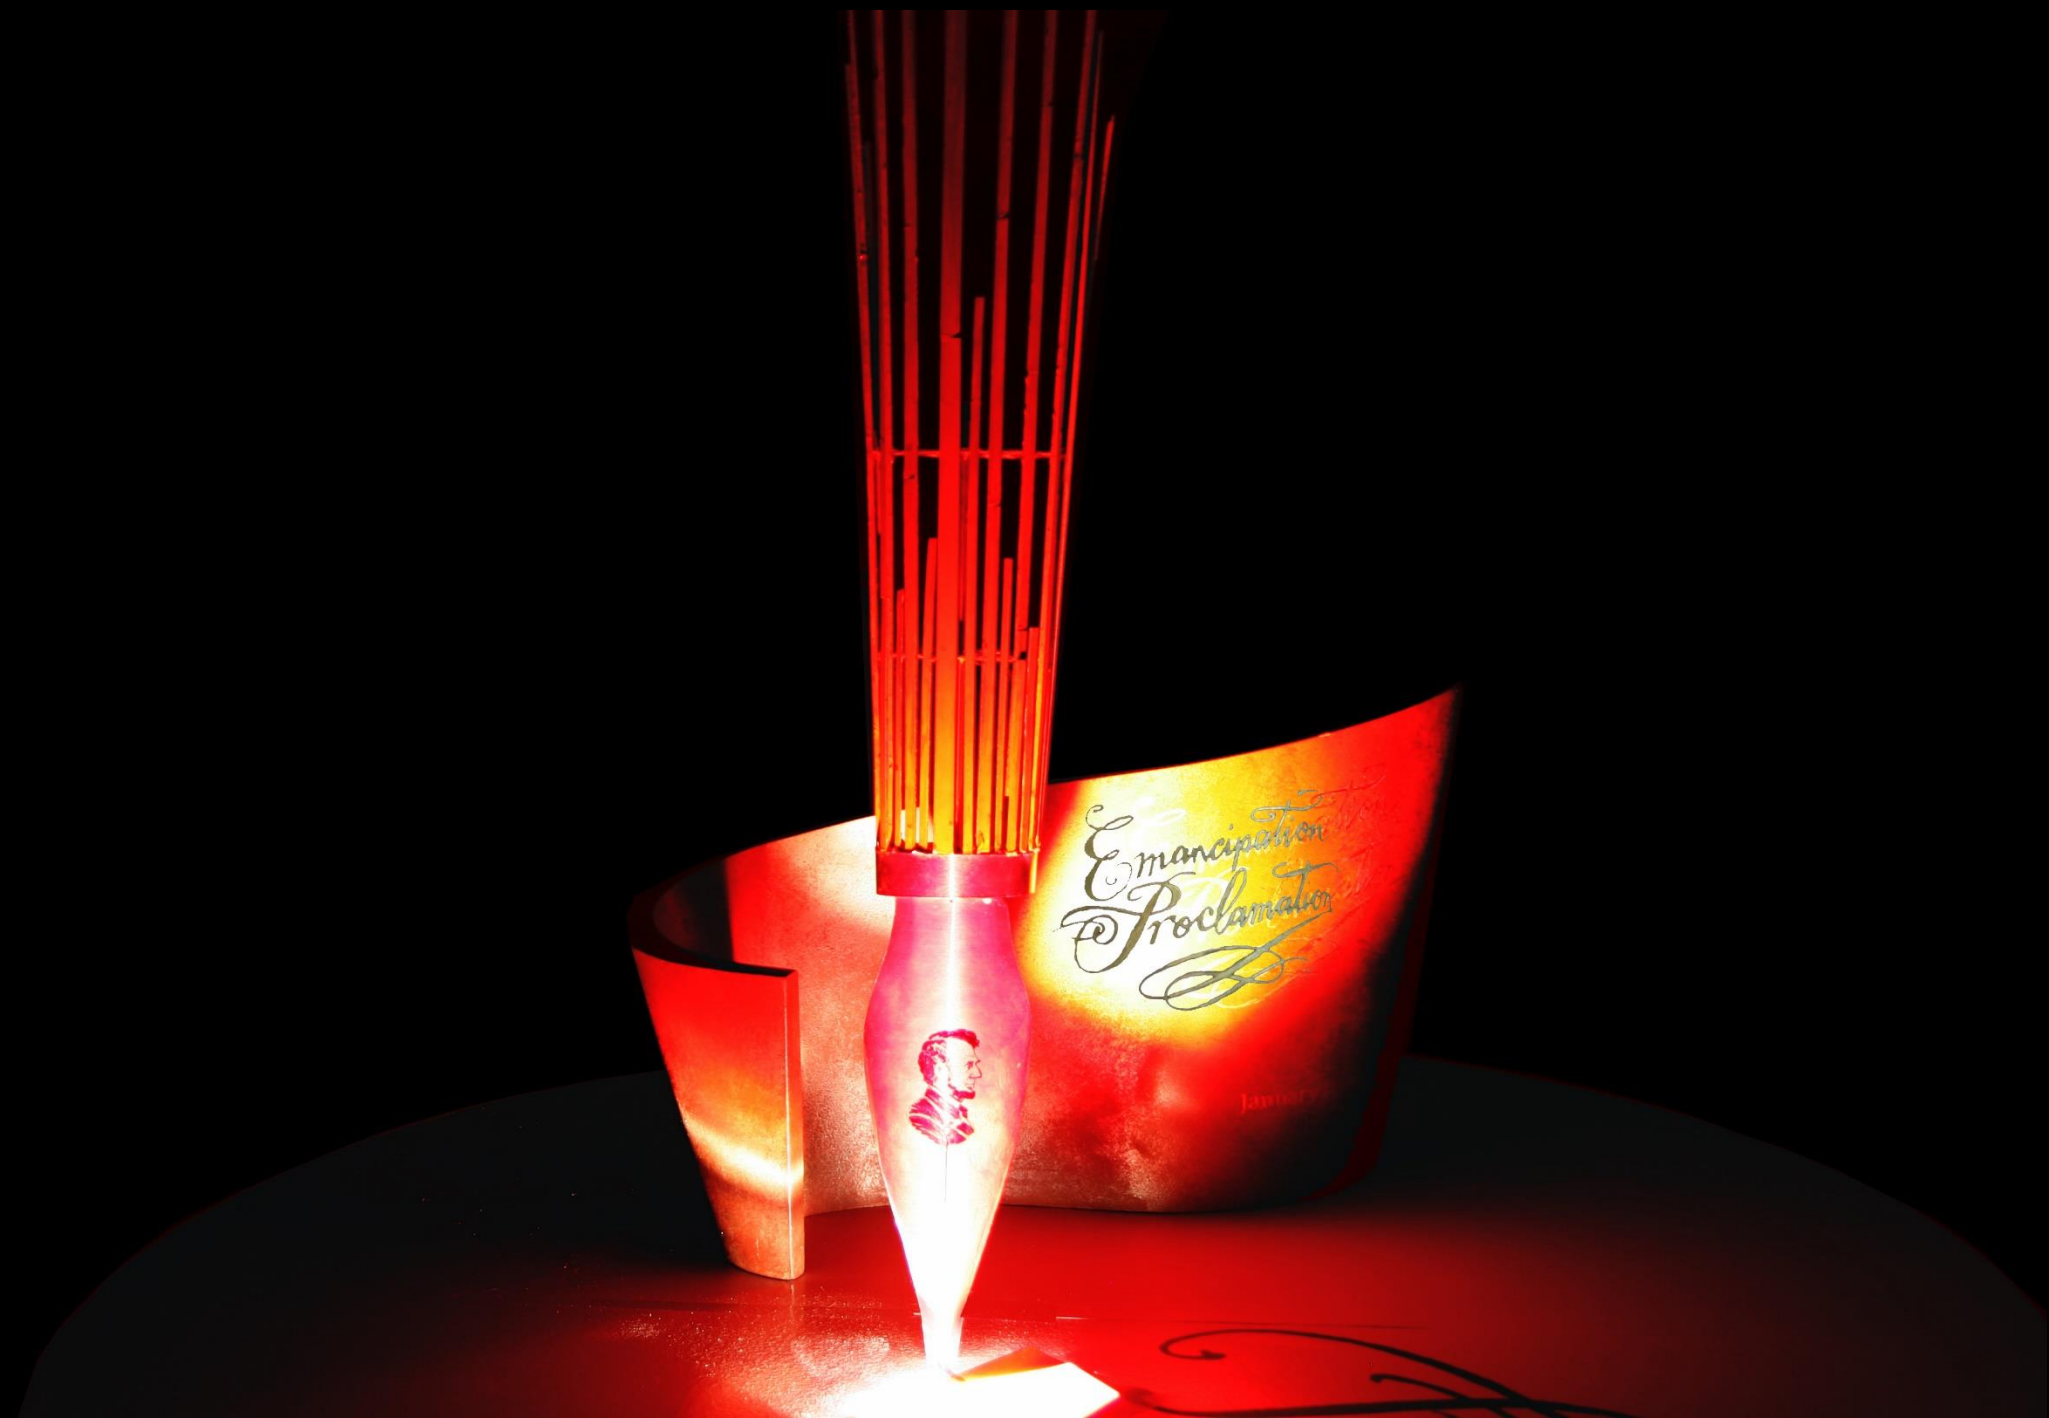

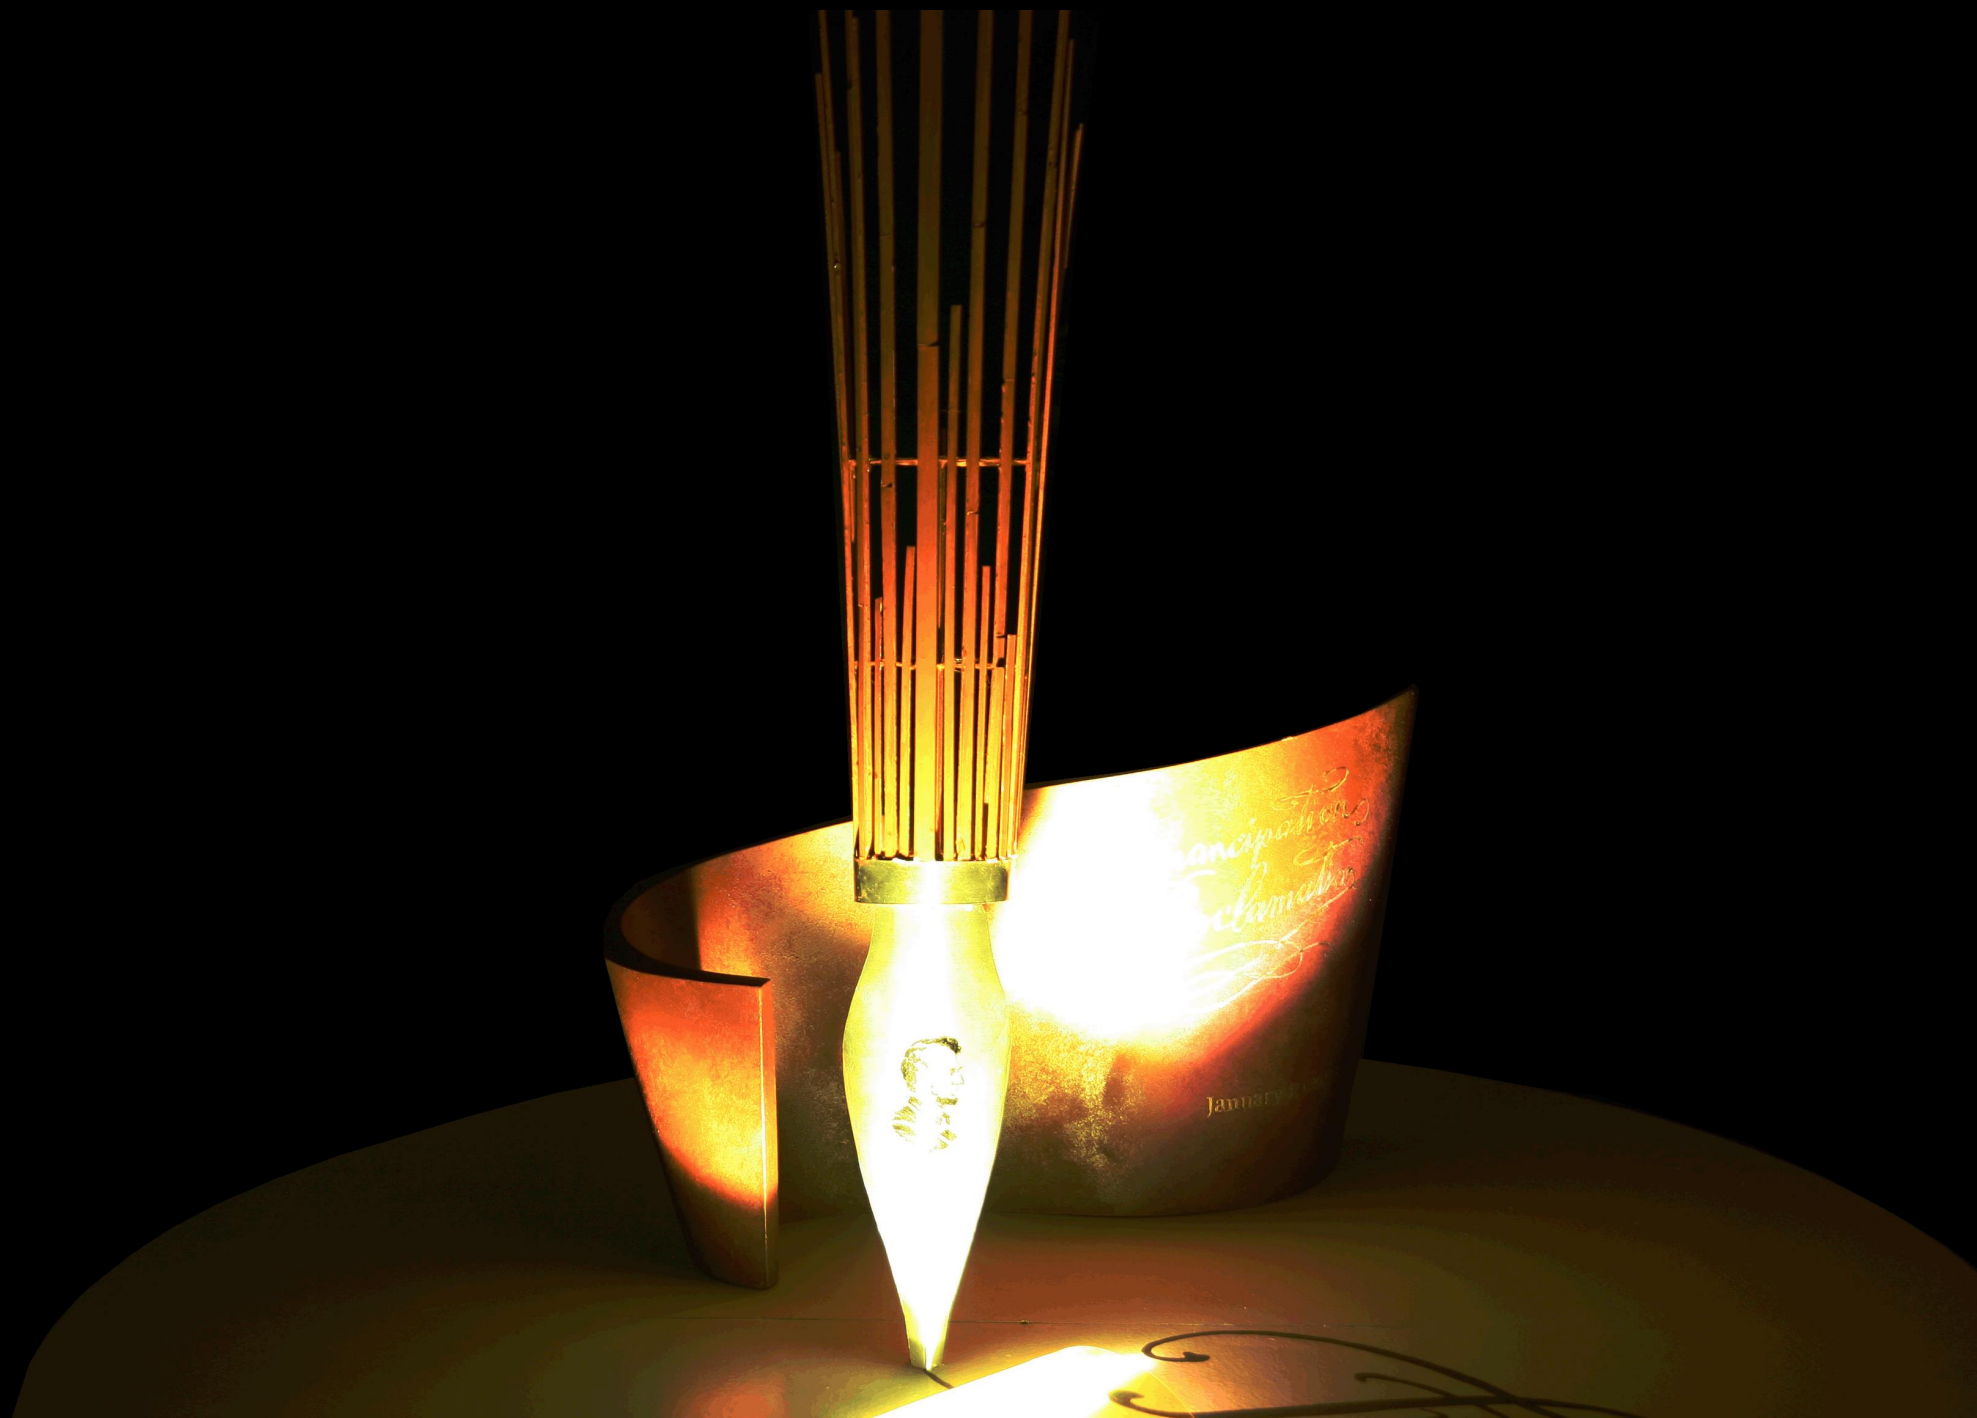



Monument	Budget as of 19 Oct 2015	Contingency	Total w Contingency	Circle sq ft	Circle Diameter
Scroll, Pen & Script	935,000	93,500	1,028,500	1,963	50
Scroll Only	855,000	85,500	940,500	1,590	45
Pen & Script Only	490,000	49,000	539,000	1,590	45



### Pen

Rolled stainless steel  
Etched portrait  
CoreTen shaft elements

Time: 7-10 months

### Concrete Circle & Footers

Demolish & remove 3,000 sq ft  
24" deep footers for scroll & pen  
12"-14" concrete over jigs  
6" thick circle outside footers  
Electrical conduits  
Local contractor

### Landscaping +

Trees & boulders

Time: 3 weeks

### Granite Scroll

Drawings: 4-6 weeks  
Shop tickets: 3-4 weeks  
Scroll fabrication: 8-12 weeks  
Shipping: 1 week  
Stainless steel jig  
Installation: 1 week

Time: 15-24 weeks

### Granite Pavers

2' x 2'  
3" thick  
Concrete bed: 6" thick  
Mortar bed: 1.5" thick  
Ship & install: 2 weeks

Time: 8-10 weeks


### Maintenance

Minimal


### Optional Feature

Gobo projector



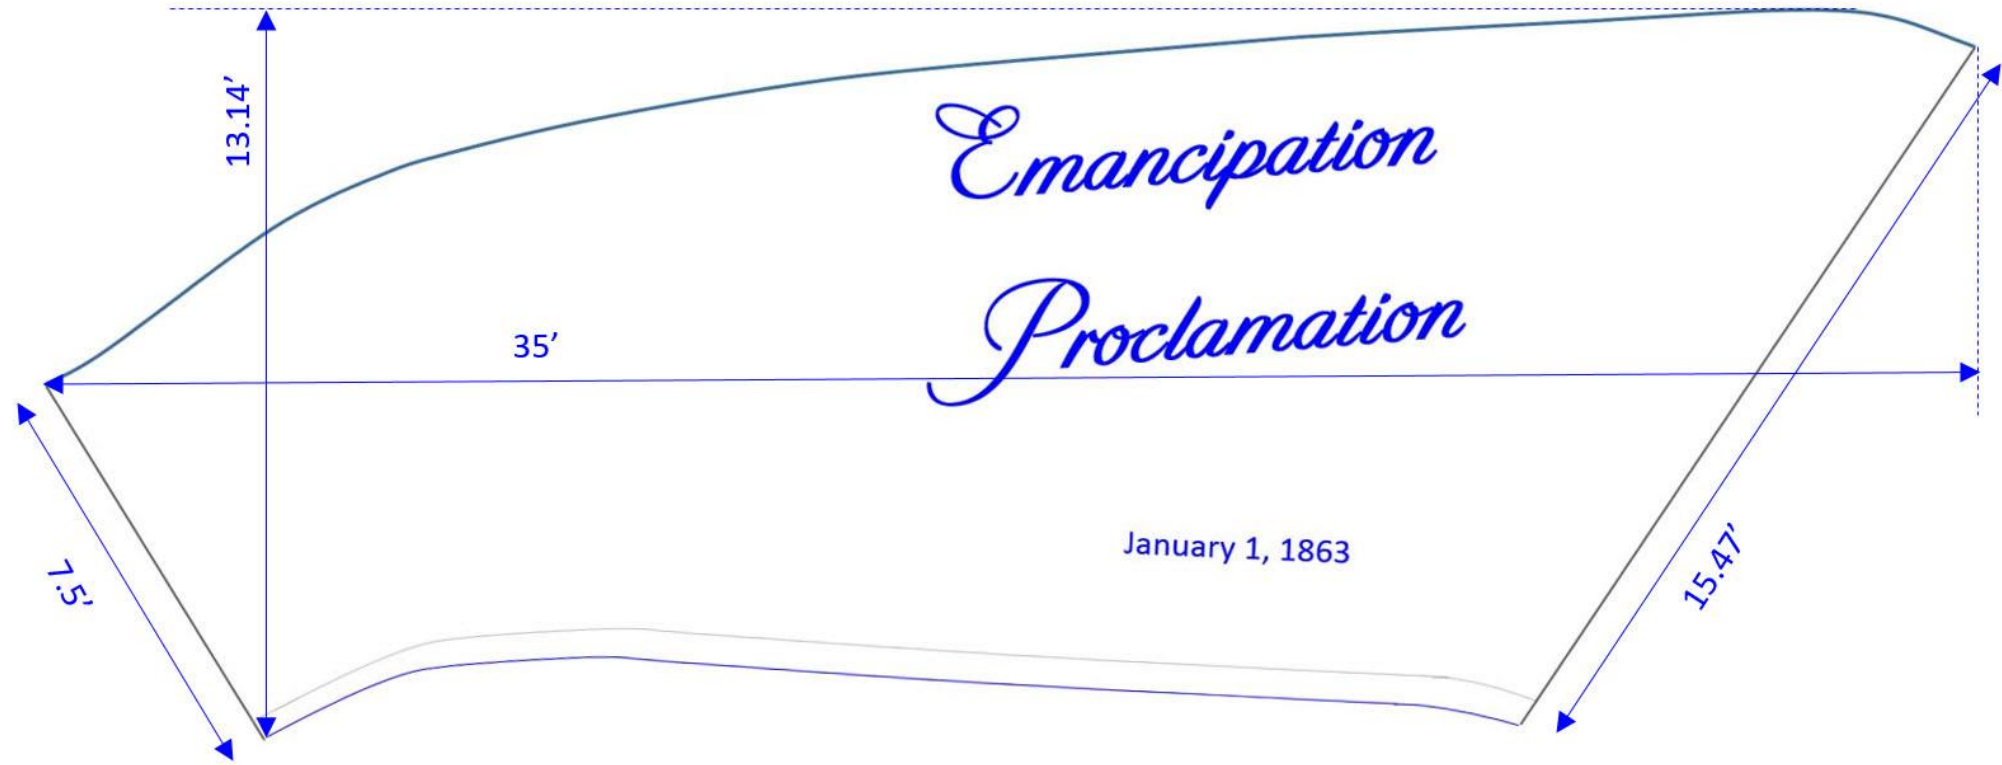

S-Curve Viewed Along Shorter Edge

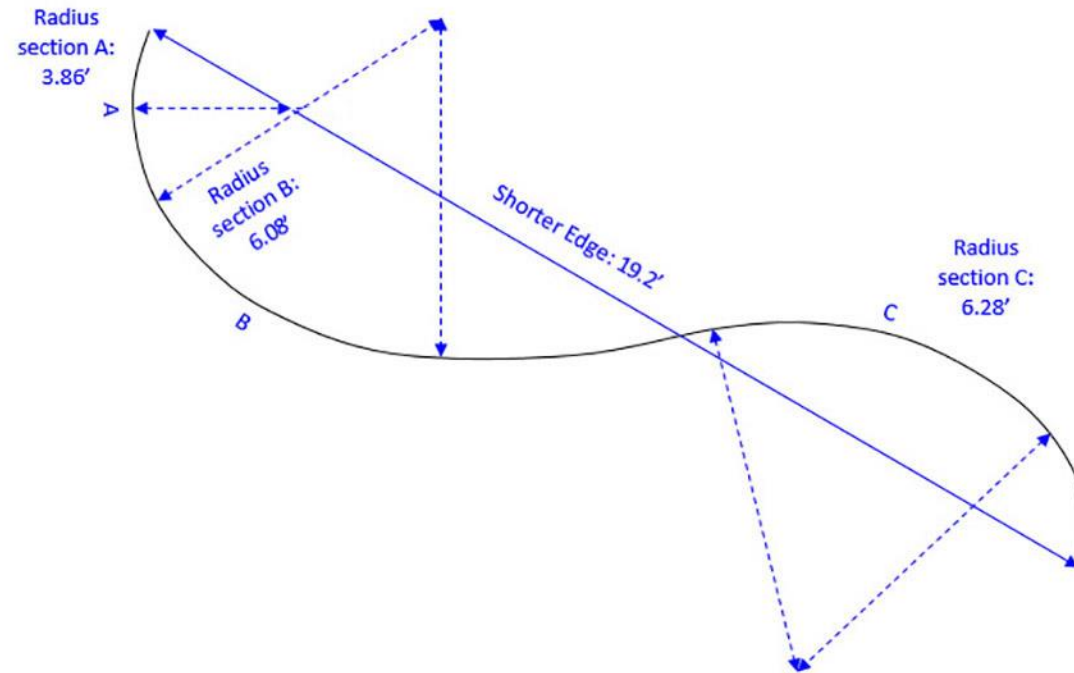



Pen-Nib Box Structure

